



Fibre Converter

Introducing the combined Fibre Converter and 2 port Switch, Telesafe sets a new standard for trunk mounted fibre to the desk solutions.

The Telesafe fibre converter is a 10/100Base-T/TX to 100Base-FX converter designed for installation in most standard European cable ducts. The unit fits easily into the existing socket base plates throughout the cable trunking. The unique and compact design is supplied with a standard double Telesafe Frame (size: 80 x150mm) in front and a fibre winding facility in the rear.

Features

- Two 10/100 Base-T/TX RJ45 (STP) ports
- One 100Base-FX (Multimode Fiber) Interface (SC or MT-RJ)
- Auto Speed Negotiation
- All Converters comply with IEEE 802.3/802.3u Ethernet and Fast Ethernet Standards
- Store and Forward switching Mechanism
- Fiber Optic Distance up to 2,000m / 6,600 ft
- Fiber winding facility on the rear side
- LED Indication for Power / Link / Activity/ FDX
- External Power Supply

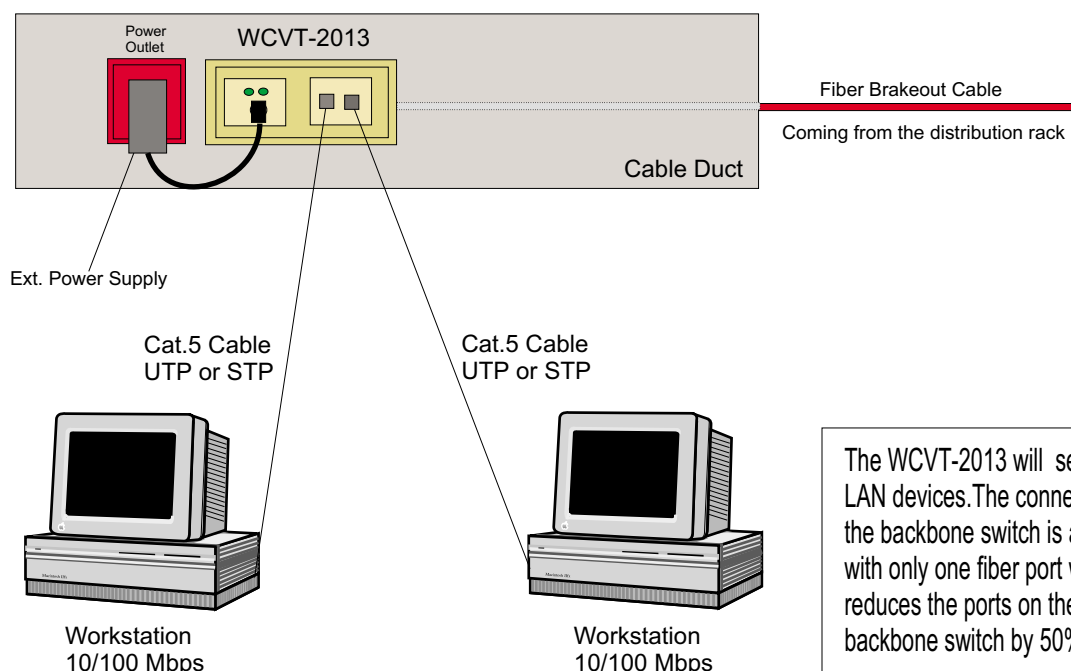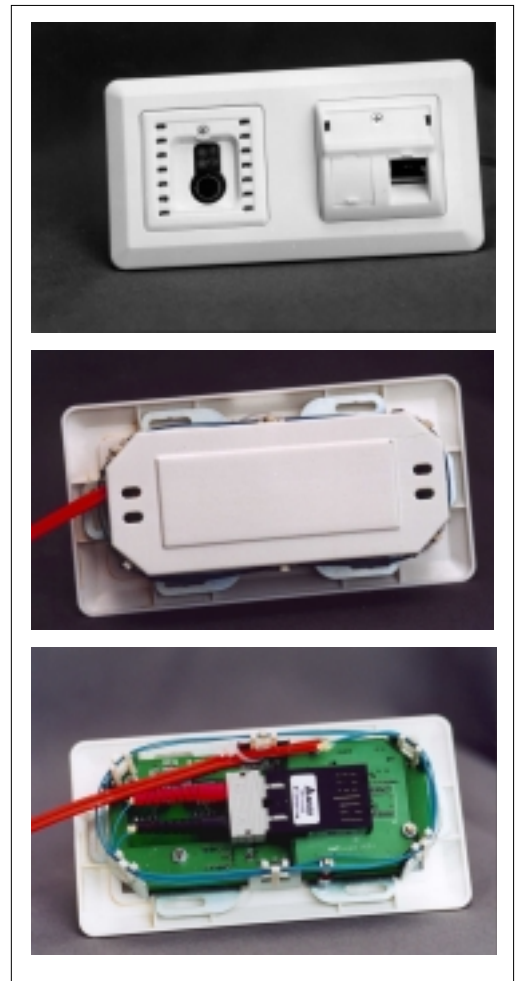

The WCVT-2013 will serve 2 LAN devices. The connection to the backbone switch is achieved with only one fiber port which reduces the ports on the backbone switch by 50%

For ordering information, see next page

Ordering information

Fibre Converter	Ivory (RAL 1013)	White (RAL 9010)
For wall mounting		
UTP	8700-0011	8700-0021
STP	8700-1011	8700-1021
For trunk mounting		
UTP	8700-0010	8700-0020
STP	8700-1010	8700-1020

Producer:

Distributor:

Telesafe AS

P.O. Box 384, 1372 ASKER, Norway

Phone: +47 66 76 06 00 Fax: +47 66 76 06 01

E-mail: sales@telesafe.no

Internet: www.telesafe.com